



The Clear Choice
Water Filtration Systems

www.aquafilter.com

FCCBL

New Economical Carbon Block Cartridge with Improved Technology

Delivers the Best Quality and Performance

Carbon blocks manufactured by **Aquafilter® Europe** are made from the highest quality materials.


In order to assure the maximum level of water purification at an incredibly low price, high quality bituminous carbon (without iron and heavy metals) was utilized.

It complies to the strict standards of National Sanitation Foundation (NSF).

The cartridges are excellent in chlorine and organic substances reduction as well as taste and odor improvement.


Features:

- High quality
- Competitive Pricing
- Fast product delivery
- Made of safe, food grade materials
- Possibility to order small quantities
- Made in EU
- Money- and time-saving compared to other Carbon Block Products
- Excellent filtration at small pressure drops
- Removes chlorine, its derivatives and organic substances
- Improves taste and odor of water

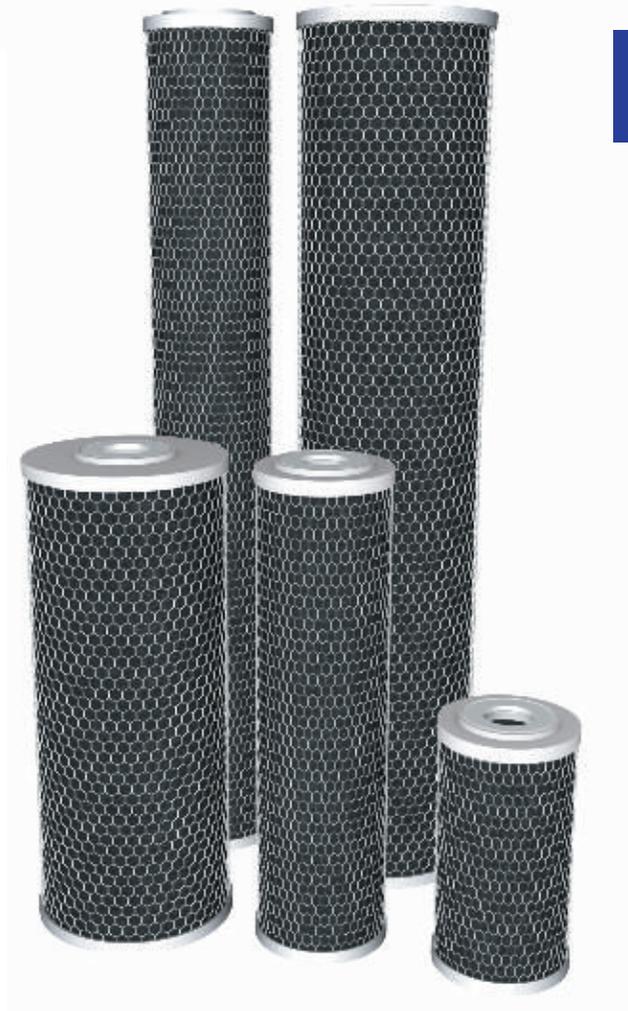

Made in EU

Activated carbon performance

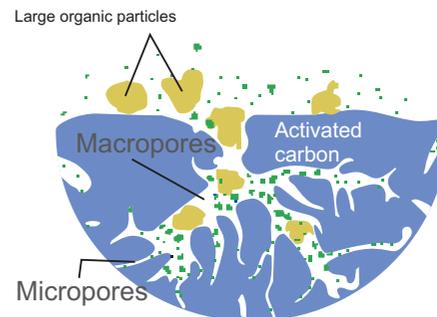

Supplied water penetrates the block from its outer surface to the core. Chlorine and its derivatives are held on its surface while purified water passes through to the inside of the block.





The Clear Choice
Water Filtration Systems

www.aquafilter.com

FCCBL




New Economical Carbon Block Cartridge with Improved Technology
Delivers the Best Quality and Performance

CAT#	Size	Working temperature	Nominal pore size	Chlorine reduction* (Filter Life)		
				L	gal	months
FCCBL5	4 7/8" x 2 1/2" (124 mm +/- 1 mm x 69 mm +/- 1 mm)	2°C - 80°C (35°F - 176°F)	5 µm - 10 µm	7386	1953	3 - 6
FCCBL	9 7/8" x 2 1/2" (250 mm +/- 1 mm x 69 mm +/- 1 mm)	2°C - 80°C (35°F - 176°F)	5 µm - 10 µm	15.913	4209	3 - 6
FCCBL-L	20" x 2 1/2" (508 mm +/- 2 mm x 69 mm +/- 1 mm)	2°C - 80°C (35°F - 176°F)	5 µm - 10 µm	33.304	8810	3 - 6
FCCBL10BB	9 7/8" x 4 1/2" (250 +/- 1 mm x 105 mm +/- 1 mm)	2°C - 80°C (35°F - 176°F)	5 µm - 10 µm	52.037	13.766	3 - 6
FCCBL20BB	20" x 4 1/2" (508 mm +/- 2 mm x 105 mm +/- 1 mm)	2°C - 80°C (35°F - 176°F)	5 µm - 10 µm	108.447	28.689	3 - 6

Free chlorine content was set as 2 ppm (mg/L). Maximum allowed free chlorine content according to regulations is 0.2 ppm (mg/L).
* filter cartridge lifetime based on contamination level of potable water.

Specifications:

Media: bituminous activated carbon
Filter Life*: 3 - 6 months
Operating Pressure: 6 bar (90 psi)
Minimum Temperature: 2°C (35°F)
Maximum Temperature: 80°C (176°F)
Contaminant Removal: Chlorine, VOC's
End caps: PP
Gasket: Silicone
Netting: LDPE

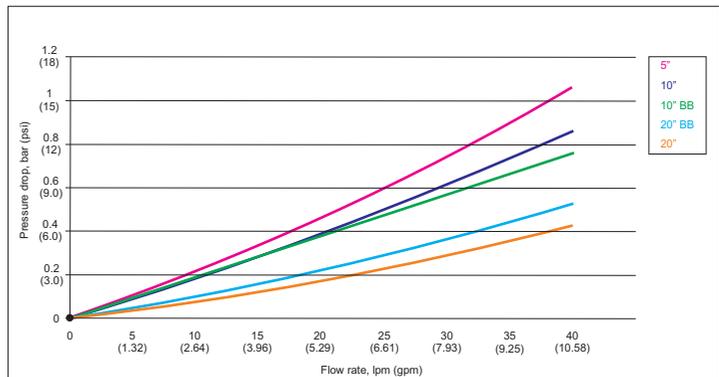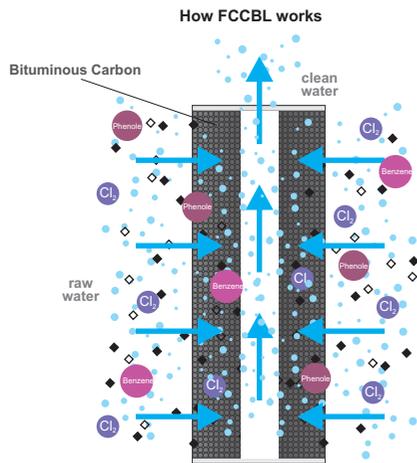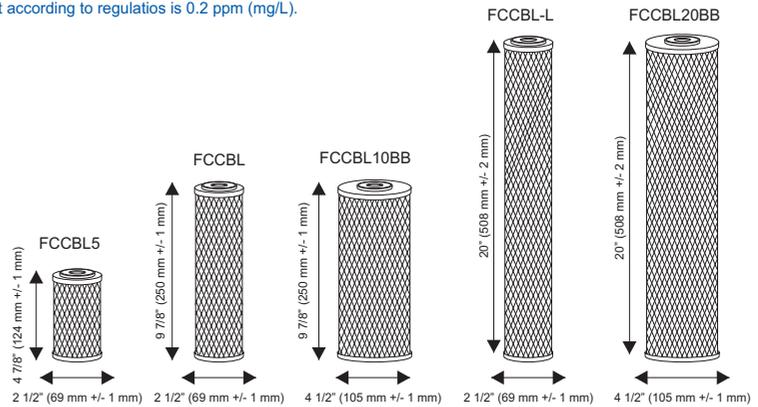

- Performance claims are based on independent lab results and manufacturers internal test data. Actual performance is dependent on influent water quality, flow rates, system design and applications. Your results may vary.
 - Micron ratings based on 85% or greater removal of given particle size.
 - Estimated capacity using 2ppm free chlorine with greater than 90% reduction.
 - Flush new cartridges until water runs clear prior to use.
 - Performance data has not been tested.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Activated carbon block filters are not designed to remove bacteria or viruses.

Limited Warranty: AQUAFILTER warrants that this product is free from defects in materials and workmanship. This limited warranty does not apply to failures that result from abuse, misuse, alteration or failure to properly comply with installation or cartridge change instructions.

All Aquafilter images, trademarks, logos, and other intellectual property are the sole and exclusive property of Aquafilter, Inc. and may not be used without our express written permission.

Aquafilter Manufacturing Facility

Aquafilter Inc.
 Hunt Valley 21030, USA
 us@aquafilter.com

Aquafilter Germany
 15234 Frankfurt, Germany
 de@aquafilter.com

Aquafilter Europe
 91-222 Lodz, Poland
 pl@aquafilter.com

